
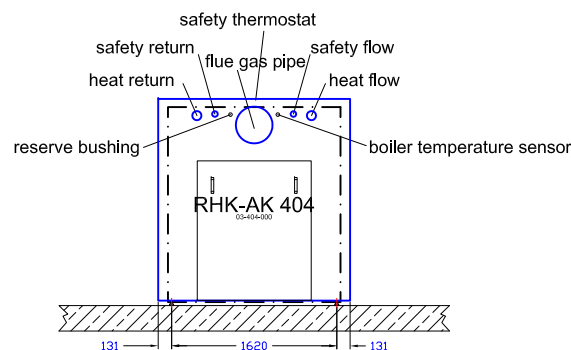
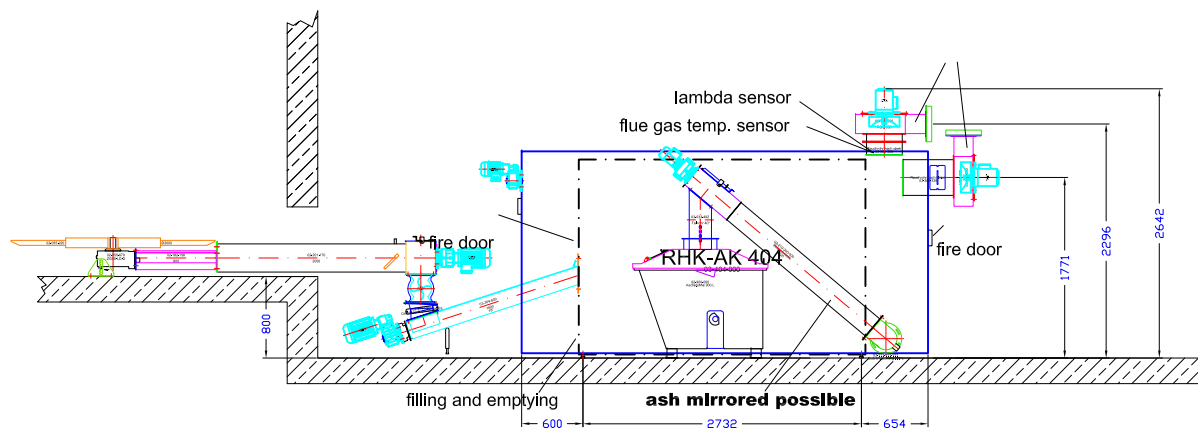


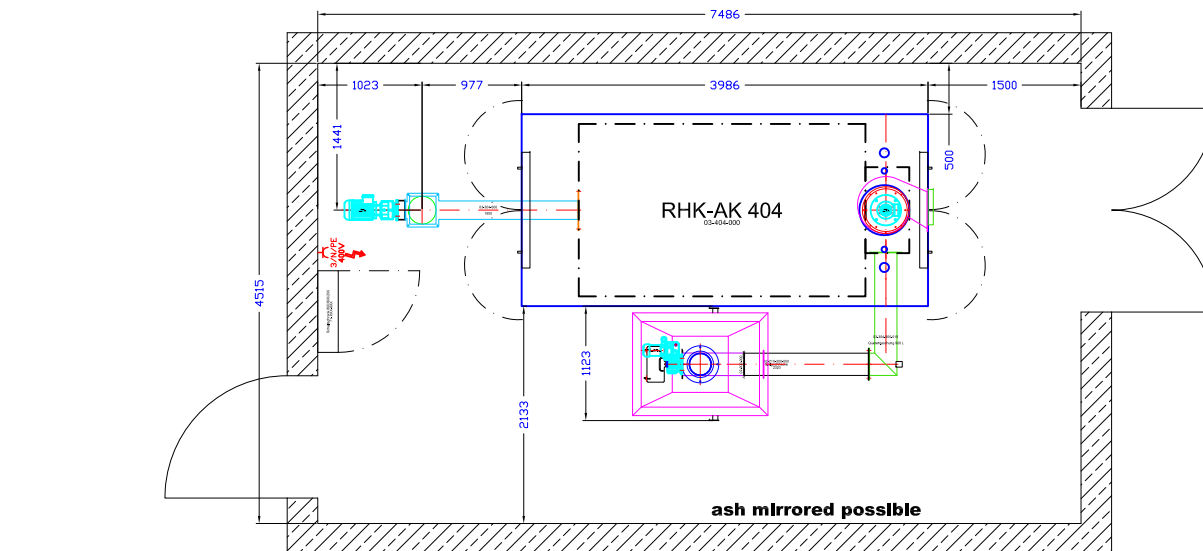

the right to any changes as
 may be technically or legally
 required is reserved.

technical specifications RHK-AK 404

width (mm)	1695 (1692)
length (mm)	3530
height (mm)	1925 (1779)
width with cover panel (mm)	1880
length with cover panel (mm)	3990
height with cover panel (mm)	2035
water content (l)	1580
weight (kg)	6200
heating surface (m²)	33,75
heating output (kW)	0 - 400
rated heat output (kW)	*360 / **320
CO² (%)	10,00
efficiency (%)	>90
flue gas mass flow (kg/Sek.)	0.330000
flue gas temperature (°C)	180
flue depress (Pa)	-
flue depress with fgb (Pa)	28
flue depress with underpressure control (Pa)	10
pressure drop at dT 10K (mbar)	162,30
max. pressure (bar)	3
heat flow (DN)	80
heat return (DN)	80
safety flow (Zoll)	1 1/2
safety return (Zoll)	1 1/2
filling and draining (Zoll)	1 1/4
safety cooling inlet (Zoll)	-
safety cooling outlet (Zoll)	-
sensor safety valve (Zoll)	-
flue gas pipe Ø (mm)	350
min. opening for air supply (cm²)	850
power supply	400V/32A 5polig
min. volume flow rate for return flow boot at 15K (m³/h)	7,64

Heizomat

technical specifications RHK-AK 404

Stand 29.04.2011

Fa. Heizomat GmbH - Gerätebau / Energiesysteme - 91710 Gunzenhausen - OT Maicha 21 - 09636/9797-0